

Midwest Electric Products, Inc.

GFI Disconnect Spa Panels

Midwest's GFI disconnects offer a convenient, low-cost way to satisfy National Electrical Code (NEC) requirements for ground fault disconnects for spas, hot tubs, water heaters and swimming pools. The NEMA 3R design ensures safe, weather-tight installation for residential, light commercial and even some industrial applications. In addition to the GFI disconnects shown here, Midwest offers the full range of high quality A/C disconnects in metal and plastic, fused or non-fused, single- or three-phase.

- Extra circuit breaker spaces allow for future expansion
- Fully assembled unit saves costly installation time
- G90 galvanized steel construction with a durable powder coat finish for superior corrosion protection and durability
- NEMA 3R weatherproof enclosures
- 125A rating
- All terminals accept copper or aluminum wire for installation flexibility
- Includes both overcurrent and ground fault protection
- UL Listed
- Overhead hub opening
- Lockable enclosure



UG412RMW250



UG412RMW260



GFI Disconnect Spa Panels


Specifications

- 125A enclosure rating
- 2 or 4 extra breaker spaces
- #6-2/0 lug wire size
- Gray steel enclosures (NEMA 3R)

GFI Protection Rating	Model Number
50 Amps	UG412RMW250
60 Amps	UG412RMW260




Layout

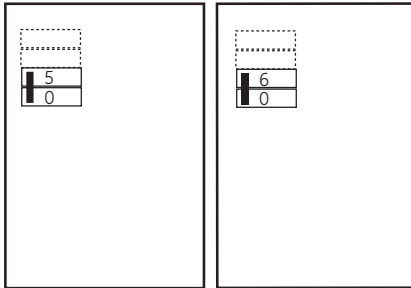


UG412RMW250

UG412RMW260

Dimensions

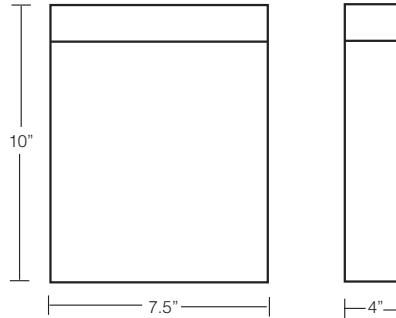

Knockouts



A = 1/2"
 C = 1/2", 3/4", 1"
 E = 3/4", 1 1/4", 1 1/2"

For your landscape or architectural lighting needs, ask for Midwest Electric's outdoor power outlets. They're available in a range of models, and all mount easily onto our attachable post.



5x7 enclosure shown mounted to M57POST24G1 with optional accessory kit M57PT24ACCG1 installed



U012010GRP



U010010GRP

Information provided is subject to change without notice. Please verify all details with Midwest Electric Products. All values are design or typical values when measured under laboratory conditions, and Midwest makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

Midwest Electric Products, Inc.
 PO Box 910 • 58155 240th Street
 Mankato, MN 56002-4414
 Customer Service: 866-685-0577 • Fax: 800-705-2905
www.midwestelectric.com

© 2011 Midwest Electric Products, Inc.

MET-018 (06/11)

